

INTRODUCING THE SMALLEST ZIGBEE HOME AUTOMATION DEVICES IN THE WORLD



**NYCE
CONTROL**

How to Install a NYCE Control 4-button Keyfob

STEP 1: INSTALL BATTERY



1. Slide open the Keyfob Battery cover.
2. Remove the plastic tab from the battery.



3. Re-install the CR2032 battery with the positive (+) side pointing out.
4. Slide the Keyfob Battery cover closed.

STEP 2: INSTALL DRIVER + IDENTIFY DEVICE

Install the device's driver

- NCZ-3202 Driver is named: [DriverWorks_HA_Profile_KeyFob4B.c4i](#)
- Download driver from: www.nycecontrol.com/support or from Control4's online database
- Copy driver to My Documents\Control4\Drivers
- Open Composer and add device to project (Manufacturer = "Nyce Control")
- Identify the device by following the button presses below while the identify window is open:

Press both ① and ②, a ● flash should appear.


Immediately press ① 4 times, ●●●● flashes should appear.

After a few seconds, ●● flashes should appear.

- The device's 64-bit address should appear in the identify window's text box.



PRODUCT FUNCTION + LED INDICATORS

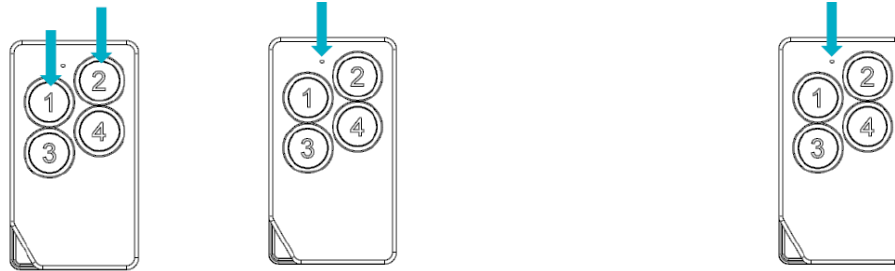

Press both ① and ②, a ● flash should appear:

Button Press	LED w/Press	Action	LED Response	Description
then ① 2 times	● ●	Network Status	● ● ● ●	Not Joined Joined
then ① 4 times	● ● ● ●	Network Join	● ● ● ●	Join Successful Join Unsuccessful
then ① 6 times	● ● ● ● ● ● ●	Network Leave	● ●	Leave Successful
then ① 10 times	● ● ● ● ● ● ● ● ● ● ● ●	Restore Defaults	● ● ● ● ● ● ● ●	Leave (if joined) and Defaults Restored
		No Action	● ● ● ● ● ●	Unsupported Command Network Error, retry Device Busy

Normal Operation:

Any	●	Any	●	Command Acknowledged
Any		Any	● ● ● Long Pulses	Low Battery